










QR PWXL


-  Optics 110°
-  Ceiling
-  Hanging
-  Push/1-10V Optional
-  DALI Optional
-  Casambi Optional
-  CRI TYP 95

SISTEMA DI FISSAGGIO


A. Clip

FASTENING SYSTEM


A. Clip

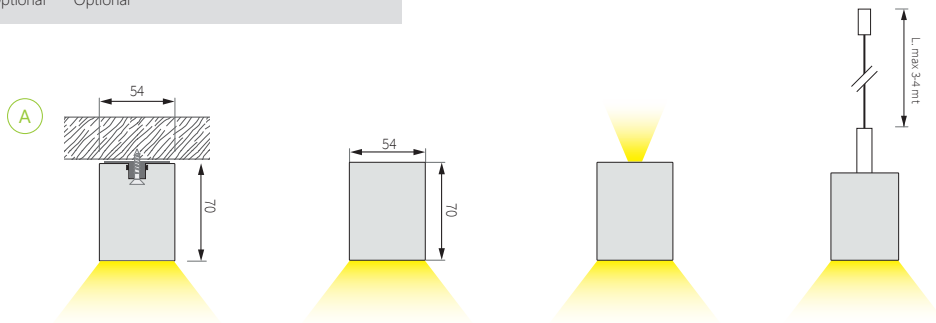

Composizioni Compositions



	Q1		Q2		Q3		Q4		
	500X500 mm		1040X1040 mm		1530X1530 mm		2410X2410 mm		
	Direct Light 63W 24Vdc CRI TYP 95	Direct and Indirect Light 126W 24Vdc CRI TYP 95	Direct Light 120W 24Vdc CRI TYP 95	Direct and Indirect Light 240W 24Vdc CRI TYP 95	Direct Light 177W 24Vdc CRI TYP 95	Direct and Indirect Light 354W 24Vdc CRI TYP 95	Direct Light 280W 24Vdc CRI TYP 95	Direct and Indirect Light 560W 24Vdc CRI TYP 95	
CCT	2700 K	6128 lm	10737 lm	11628 lm	20372 lm	17128 lm	30007 lm	27050 lm	47390 lm
	3000 K	6438 lm	11396 lm	12217 lm	21623 lm	17995 lm	31851 lm	28419 lm	50302 lm
	4000 K	6836 lm	12252 lm	12971 lm	23248 lm	19106 lm	34243 lm	30173 lm	54080 lm

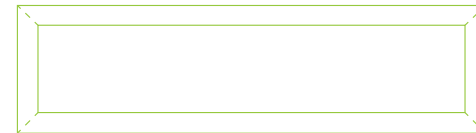


	R1		R2		R3		
	370X1410 mm		570X1900 mm		860X2490 mm		
	Direct Light 102W 24Vdc CRI TYP 95	Direct and Indirect Light 204W 24Vdc CRI TYP 95	Direct Light 143W 24Vdc CRI TYP 95	Direct and Indirect Light 286W 24Vdc CRI TYP 95	Direct Light 194W 24Vdc CRI TYP 95	Direct and Indirect Light 338W 24Vdc CRI TYP 95	
CCT	2700 K	8842 lm	16290 lm	12373 lm	22797 lm	16782 lm	30919 lm
	3000 K	9036 lm	17049 lm	12646 lm	23859 lm	17151 lm	32360 lm
	4000 K	9488 lm	18242 lm	13277 lm	25529 lm	18008 lm	34624 lm

Finiture Finishings


STANDARD



Anodizzato Argento
Anodized Silver



Anodizzato Nero
Anodized Black



Anodizzato Oro
Anodized Gold



Bianco RAL 9016
White RAL 9016

